Rohde

FG

Griffserie FG25

Handlicher Funktionsgriff.

Werkstoff und Oberfläche:
Polyamid PA 6, schwarz mit Feinstruktur.

Funktionselemente:

Typ 01:
Drucktaster (Wechsler), 2 LEDs.

Typ 02:
Zwei Drucktaster mit LED.

Anschluss A:
8-poliger oder 12-poliger Stecker in Anschraubfläche des Griffschenkels. Kupplung mit 10 m fertig konfektionierter Leitung als Zubehör lieferbar.

Anschluss B:
Anschlussleitung 5 m aus Anschraubfläche des Griffschenkels herausgeführt.

Schutzart:
IP 54 (für Ausführung A bei aufgeschraubter Kupplung).



Typ 01



Typ 02



Anschluss
Connection

A



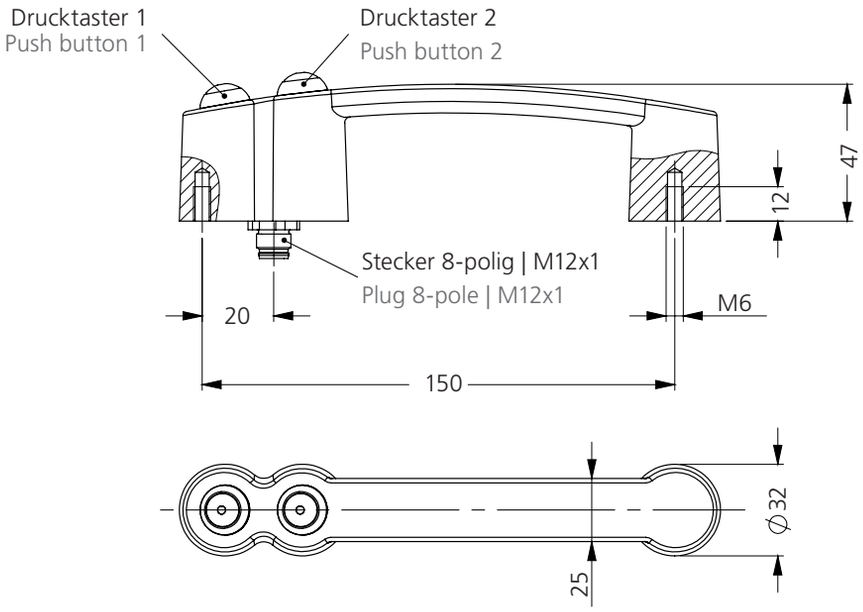
B









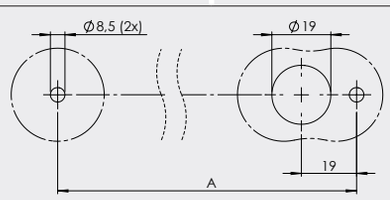
TYP	LED	A	Anschluss / Connection A Stecker A Plug Bestell-Nr. Order no.	 B Kabel B Wired Bestell-Nr. Order no.
01	Taster und 2 LEDs. Push button and 2 LEDs.	150	FG25-01S.150.84	FG25-01K.150.84
02	Taster grün / rot Push button green / red	150	FG25-02S.150.84	FG25-02K.150.84

Griff Zubehör – Kupplung mit Leitung
Handle accessories – Coupling with cable

	L	8-polig / 8-pole (M12×1) Bestell-Nr. Order no.	12-polig / 12-pole (M12×1) Bestell-Nr. Order no.
	10 m	FZ-KS.G08.10	FZ-KS.G12.10



Technische Daten | Technical data

Typ	FG25-01	FG25-02
Drucktaster 1 (1 Wechsler) Push button 1 (1 CO contact)		
Drucktaster 2 (1 Wechsler) Push button 2 (1 CO contact)	ohne without	
LED rot/gün LED red/green		ohne without
Drucktaster Push button	24 V AC/DC max. 1 A	
Betriebsspannung LED Operating voltage LED	24 V DC	
Anschlussart Connection type	8-polig / 8-pole M12×1	12-polig / 12-pole M12×1
Steckerbelegung (Ansicht Steckerseite) Connector assignment (Plug side view)		
Montageöffnung Mounting cutout		

Alle Maße in mm. / All dimensions in mm.

Rohde

FG

Handle Series FG25

Manageable functional handle.

Material and surface:
Polyamide PA 6, black with fine structure.

Function elements:

Typ 01:
Flat push button (changeover), 2 LEDs.

Typ 02:
Raised push button with red or green LED

Connection A:

8-pin or 12-oin connector at the mounting surface of the handle.Coupling with 10 m ready made cable available as accessory.

Connection B:
The 5 m connection cable leading out of the mounting surface of the handle shank.

Protection class:
IP 54 (for connection A with the coupling screwed on).